


OMSID # 320084747
320084753

StyleWell™

Model # HDFP48-56E
HDFP48-56AE

ASSEMBLY INSTRUCTIONS

Maynard 48 in. Coil Media Electric Fireplace

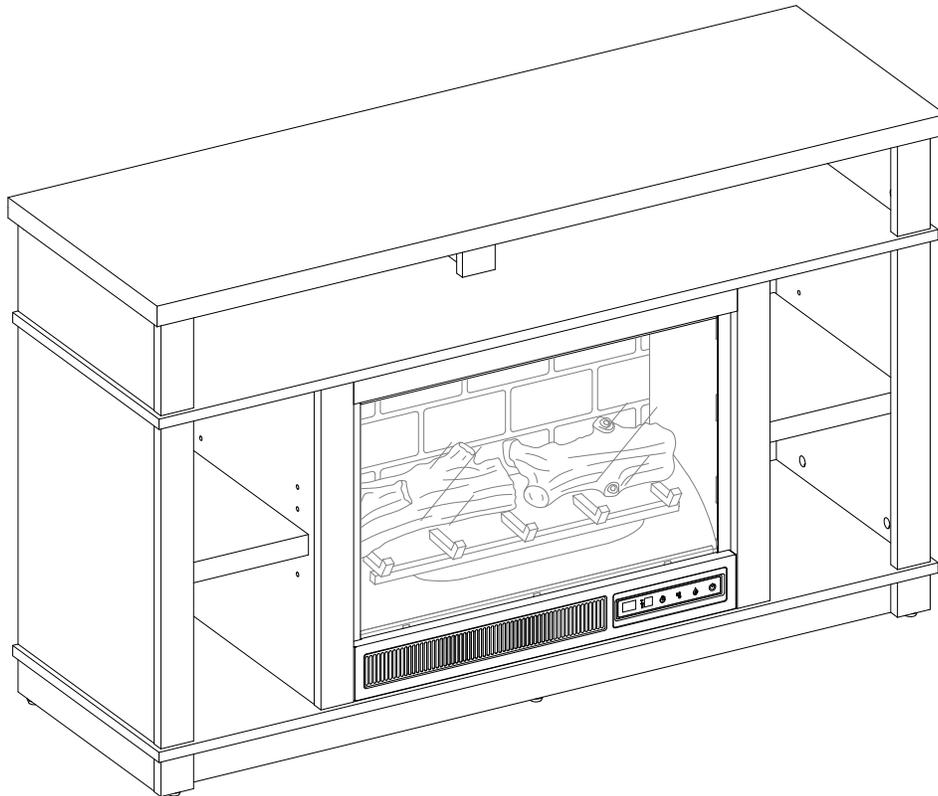

Questions, problems, missing parts?
Before returning to the store, call Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-877-527-0313

HOMEDEPOT.COM

THANK YOU

We appreciate the trust and confidence you have placed in StyleWell through the purchase of this electric fireplace/heater. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing StyleWell!!

Table of Contents

Table of Contents..... 2
Safety Information..... 2
 Maximum Recommended Weight Loads 2
Warranty..... 2
Pre-Assembly 2
 Planning Assembly..... 2
 Tools Required 2

Hardware Included..... 3
 Package Contents 4
Assembly 5
Care and Maintenance..... 24
 Caring for Wood Furniture..... 24
 Cleaning the Fireplace Trim 24

Safety Information


Please read and understand these instructions before assembling and using this console. Save these instructions for future reference.

MAXIMUM RECOMMENDED WEIGHT LOADS



WARNING: This unit is not intended for use with CRT TVs. Use only with flat panel TVs and audio/video equipment meeting recommended size and weight limits. Never use with larger/heavier than recommended flat panel TVs or equipment. To avoid instability, place flat panel TV in the centre of the unit; the base of the television must be able to rest on the supporting surface of the unit without over-hanging the edges. Improperly positioned flat panel TVs, or flat panel TVs or other equipment that exceed recommended size and weight limits could fall off or break the unit, causing possible serious injury.

Fits up to most 147.3 cm / 58 in. diagonal flat-panel TVs
 Maximum load 31.8 kg / 70 lb

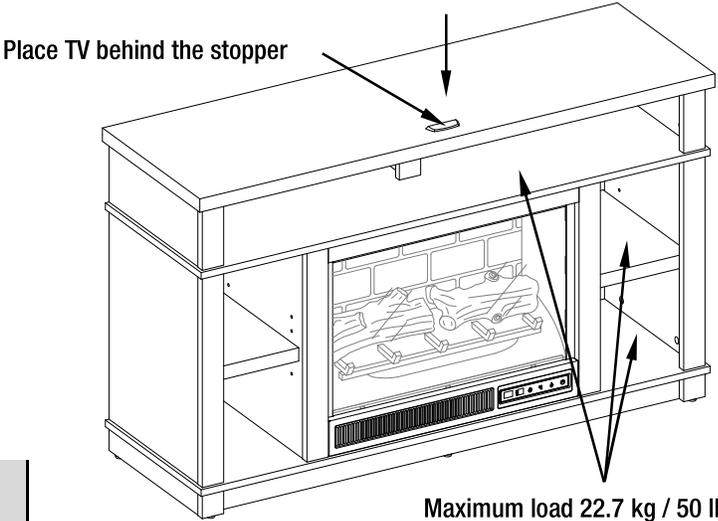

Warranty

We are confident that you will be delighted with this purchase. Should this product be defective in workmanship or materials, or fail under normal use, we will repair or replace it for a period of up to one (1) year from date of purchase.

This warranty gives you specific rights and you may also have other rights which vary from state to state.

Contact the Customer Service Team at 1-877-527-0313 or visit www.HomeDepot.com.

Pre-Assembly

PLANNING ASSEMBLY

Compare all parts with the Hardware Included and Package Contents list. If any part appears missing or damaged, do not assemble this product and contact the Customer Service Team at 1-877-527-0313.

TOOLS REQUIRED




Pre-Assembly (continued)

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.

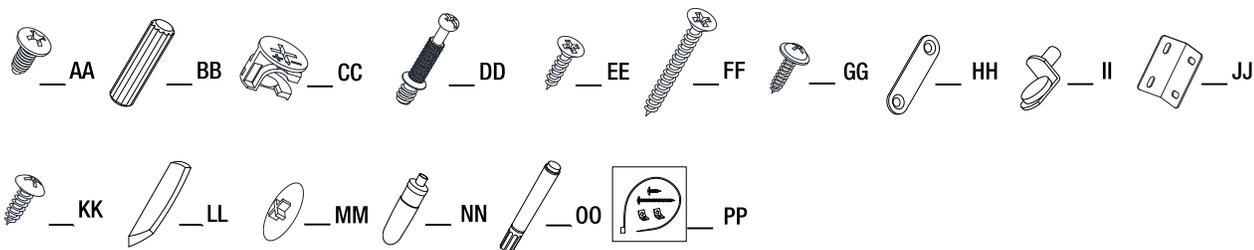


Part	Description	Quantity
AA	Insert screw	10+1 extra
BB	Wood dowel	51+2 extra
CC	Cam lock	56+2 extra
DD	Cam bolt	56+2 extra
EE	Short flat head screw	12+1 extra
FF	Long flat head screw	4+1 extra
GG	Washer head screw	36+1 extra
HH	Metal bracket	2

Part	Description	Quantity
II	Shelf Support	8+1 extra
JJ	Mending plate	2
KK	Pan head screw	8+1 extra
LL	Acrylic stopper	1
MM	Cam lock cover	30+1 extra
NN	Glue	2
OO	Touch-up pen	1
PP	Tipping restraint hardware kit	2

Pre-Assembly (continued)

PACKAGE CONTENTS

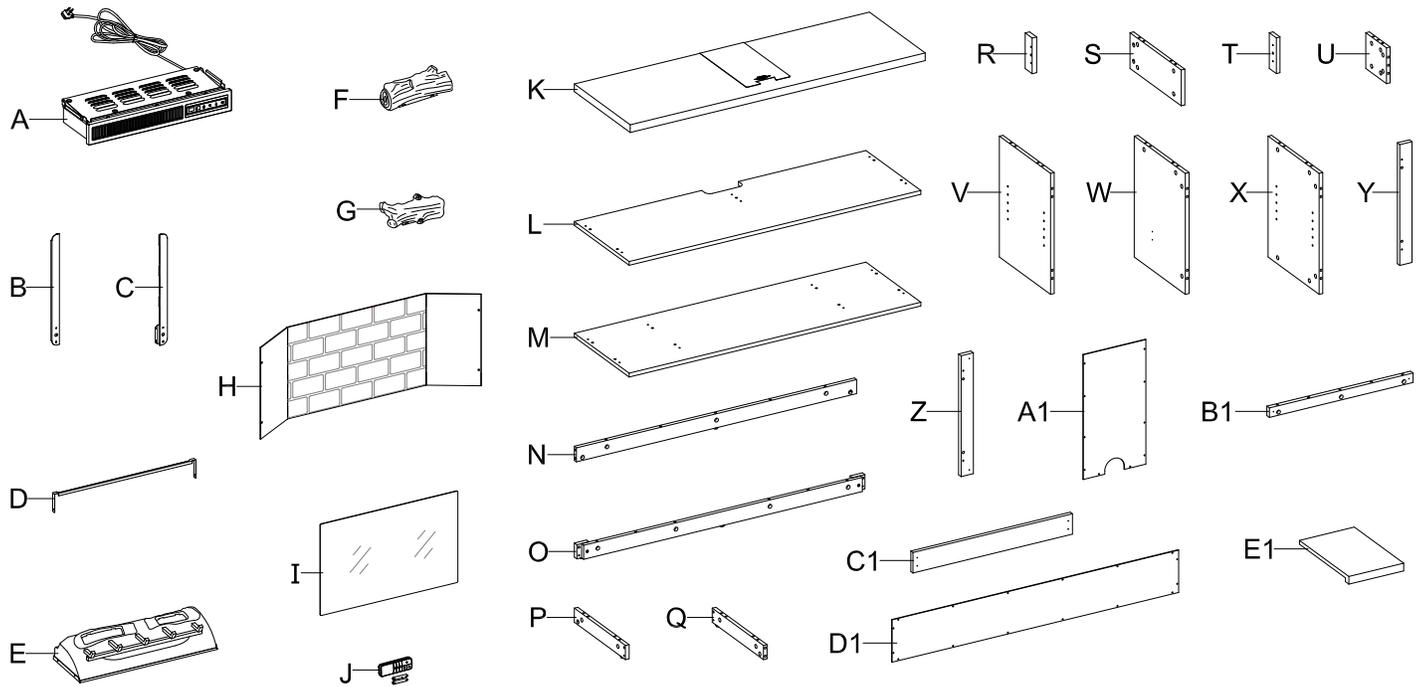

Part	Description	Quantity
A	Heater	1
B	Left upright arm	1
C	Right upright arm	1
D	Connector strap	1
E	Ember bed	1
F	Left log	1
G	Right log	1
H	Firebox wall panel	1
I	Firebox glass	1
J	Remote control with battery	1
K	Top panel	1
L	Media shelf	1
M	Bottom panel	1
N	Rear skirting	1
O	Front skirting	1
P	Left skirting	1

Part	Description	Quantity
Q	Right skirting	1
R	Upper front molding	2
S	Upper side panel	2
T	Upper partition molding	1
U	Upper partition panel	1
V	Left lower partition panel	1
W	Right lower partition panel	1
X	Lower side panel	2
Y	Lower front molding	2
Z	Middle trim	2
A1	Lower back panel	2
B1	Middle crossbar	1
C1	Firebox support	1
D1	Upper back panel	1
E1	Adjustable shelf	2


Assembly

1 Screwing the cam bolts




NOTE: Do not fully tighten all bolts until you finish assembling all parts. Once assembled, go back and fully tighten all bolts. This will make the assembly easier.

- Unpack the unit and confirm that you have all the hardware and required parts. Assemble the unit on a carpeted floor or the empty carton to avoid any scratches.
- Securely screw the cam bolts (DD) into the designated small holes on the media shelf (L), lower front moldings (Y) and middle trims (Z) using a Phillips screwdriver. **DO NOT** overtighten the cam bolts.

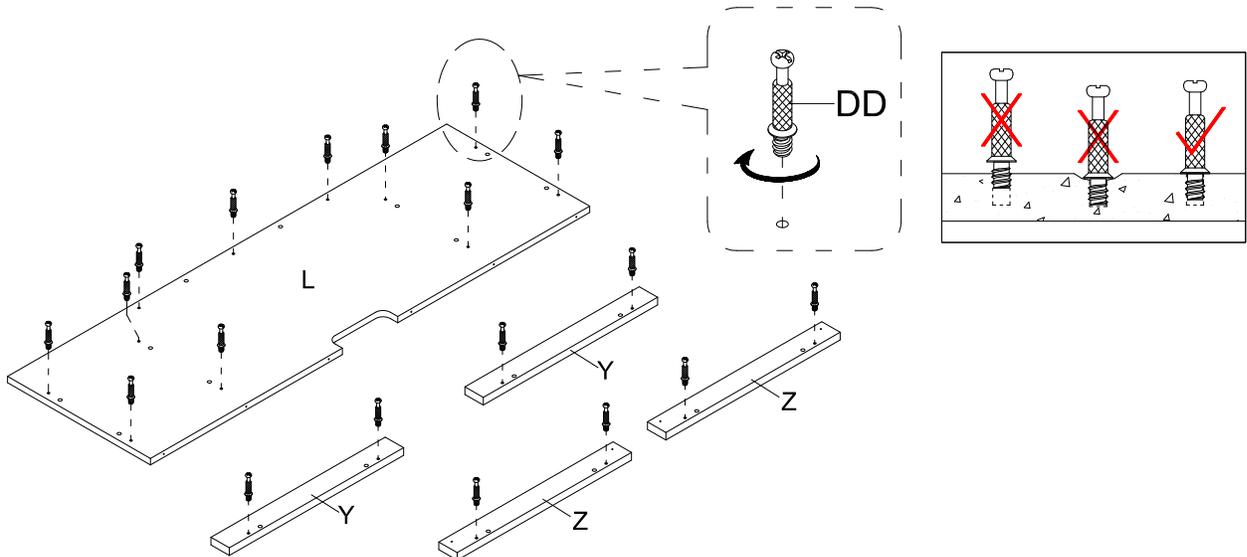

2 Preparing base assembly

- Securely screw the cam bolts (DD) into the designated small holes on the bottom panel (M), front skirting (O), left and right skirtings (P and Q) using a Phillips screwdriver. **DO NOT** overtighten the cam bolts.

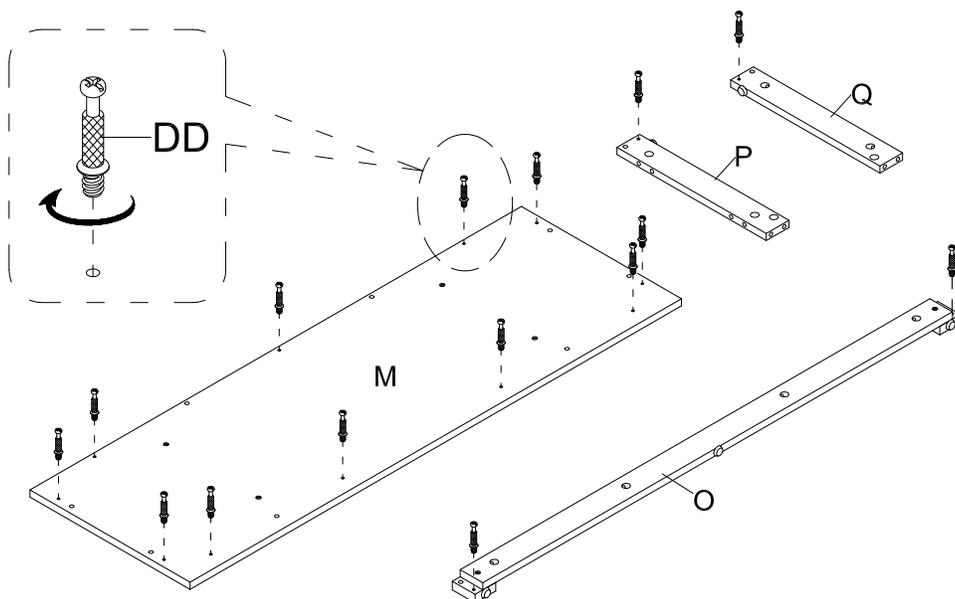



Assembly (continued)

3 Gluing the wood dowels




NOTE: Refer to the dowel assembling guide drawings in this step for further clarification on how to properly glue in the wooden dowels. Apply this method whenever instructed to install wood dowels.

- Glue the wood dowels (BB) into the designated holes on the lower panels (V, W and X) as shown.

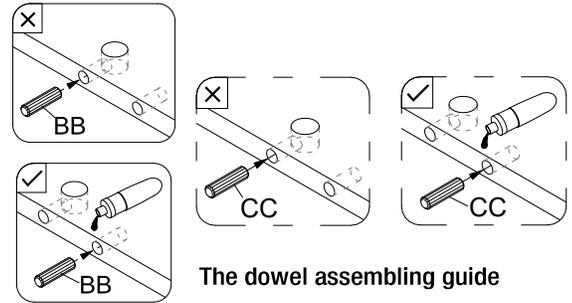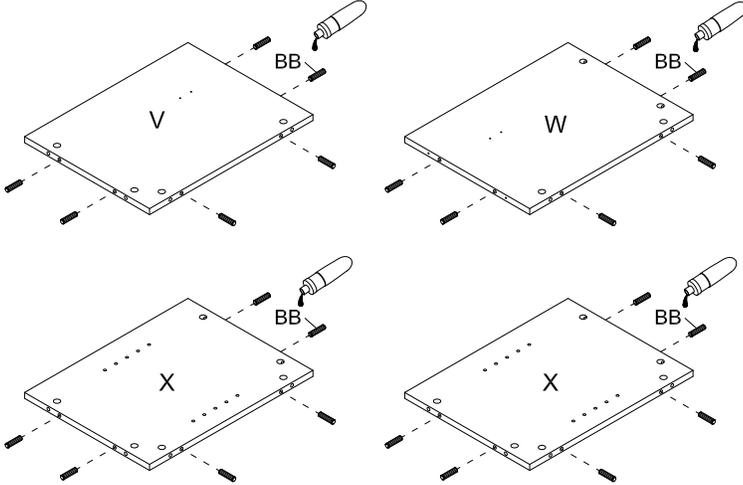

4 Gluing the wood dowels

- Glue the wood dowels (BB) into the designated holes on the bottom skirtings (N, O, P and Q) and middle crossbar (B1) as shown.

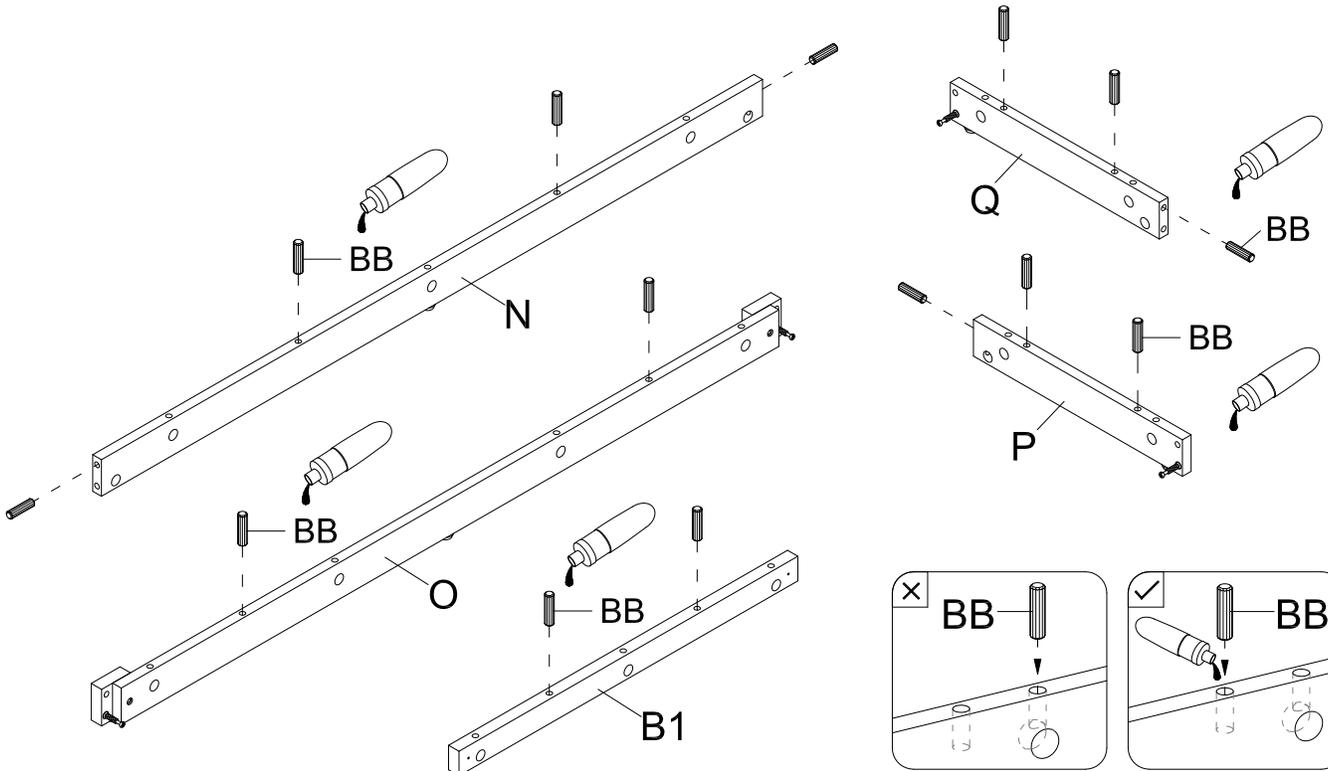


Assembly (continued)

5 Installing the lower front moldings and middle trims




NOTE: Refer to the cam lock assembling guide drawings in this step for further clarification on how to properly install cam locks. Apply this method whenever instructed to install cam locks.

- Attach the lower front moldings (Y) to the lower side panels (X) respectively by engaging two cam locks (CC) in each.
- Attach the middle trims (Z) to the lower partition panels (V and W) respectively by engaging two cam locks (CC) in each.

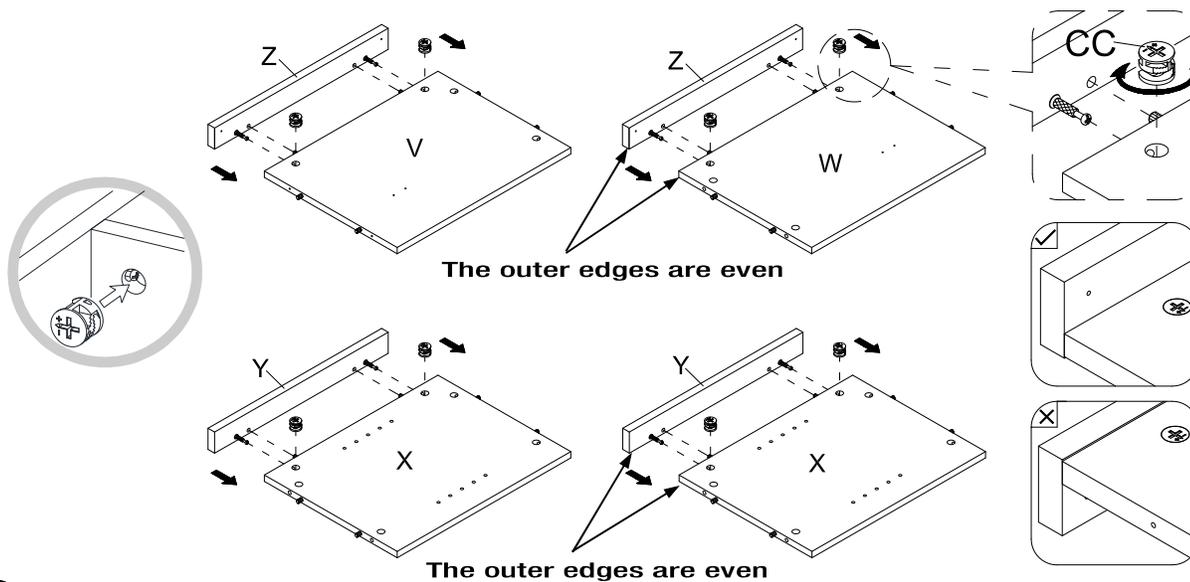

6 Attaching the middle crossbar


- Attach the middle crossbar (B1) to the media shelf (L) by engaging three cam locks (CC).

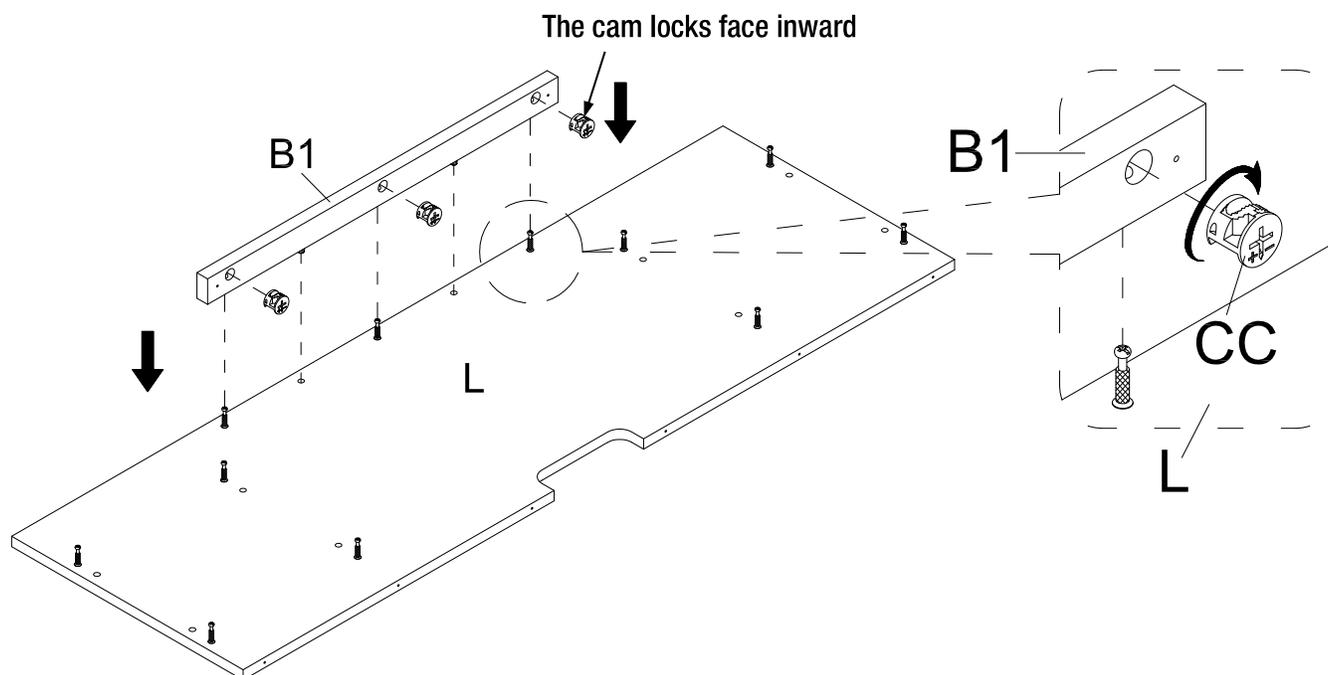

Assembly (continued)


7 Attaching the rear skirting

- Attach the rear skirting (N) to the side skirtings (P and Q) by engaging two cam locks (CC).

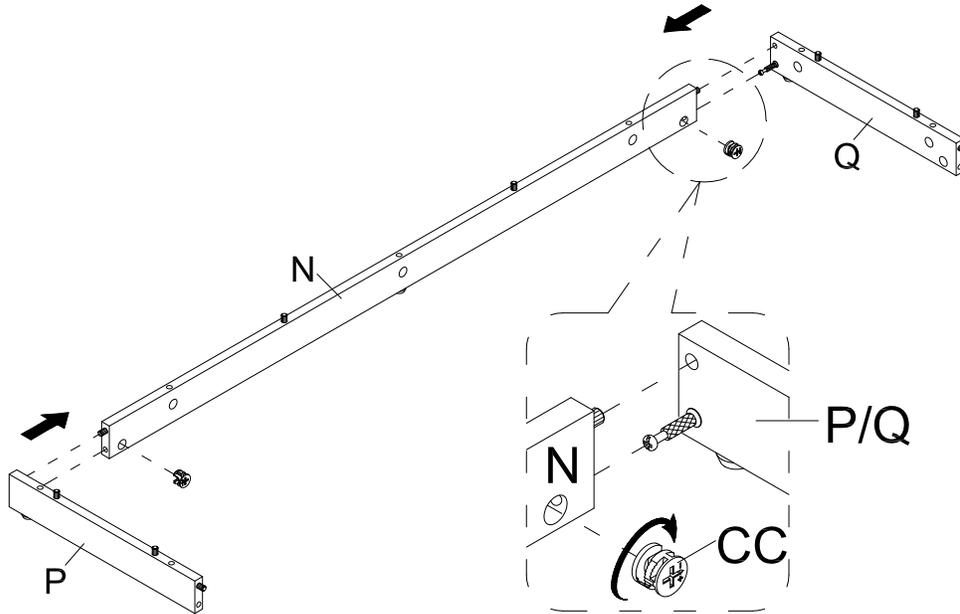

8 Attaching the bottom front skirting


- Attach the front skirting (O) to the side skirtings (P and Q) by engaging two cam locks (CC).

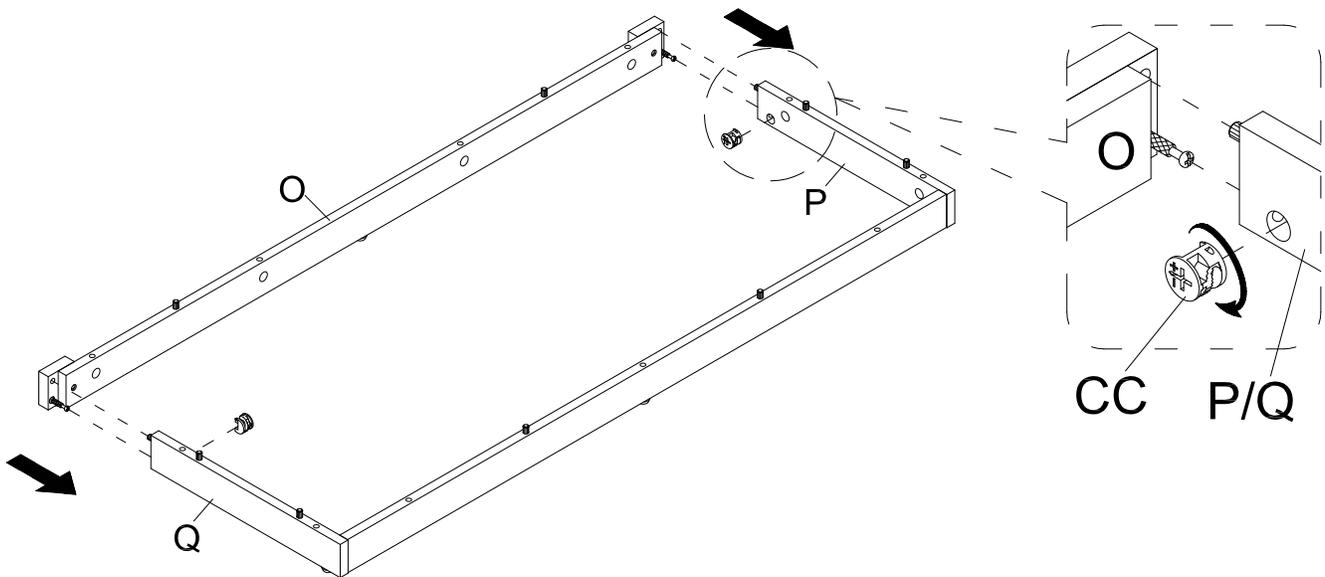

Assembly (continued)


9 Installing the base

- Attach the assembled skirting boards to the bottom panel (M) by engaging the cam locks (CC).

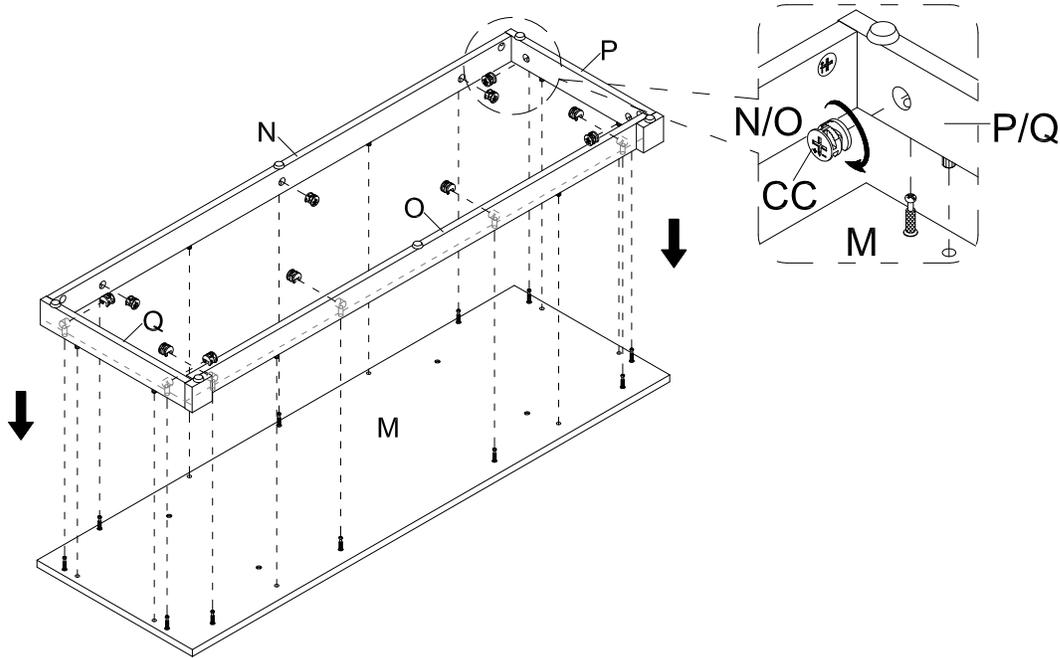

10 Screwing the cam bolts

- Securely screw the cam bolts (DD) into the designated small holes on the top of bottom panel (M) using a Phillips screwdriver.

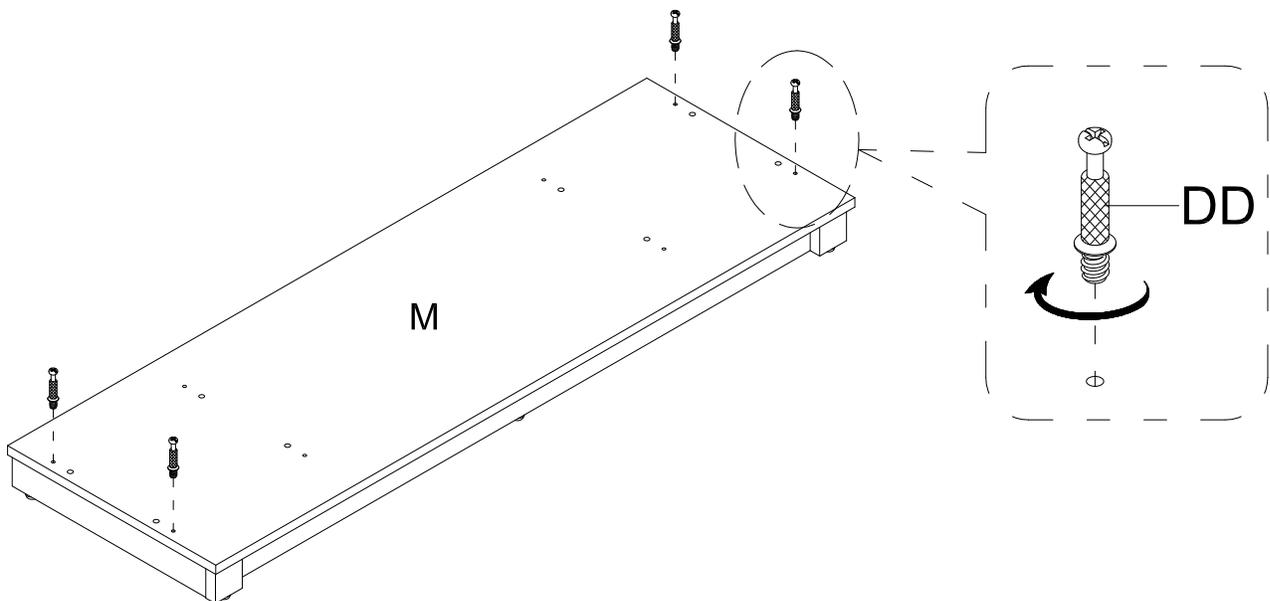


Assembly (continued)

11 Attaching the lower side panels

- Align and attach the side panels (X) to the bottom panel (M) by engaging four cam locks (CC).


The moldings point
in the same direction

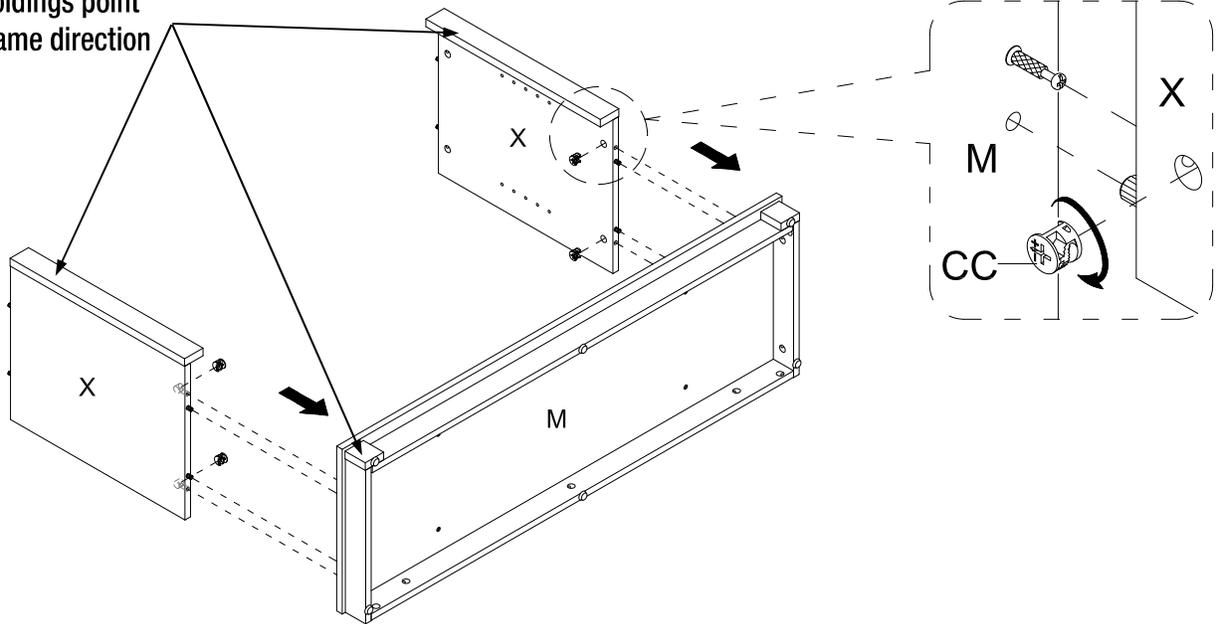

12 Attaching the lower partition panels

- Using the wood dowels as guide, firmly press the assembled lower partition panels (V and W) to the bottom panel (M) and fasten them in place with four long flat head screws (FF).

The middle trims and molding point
in the same direction

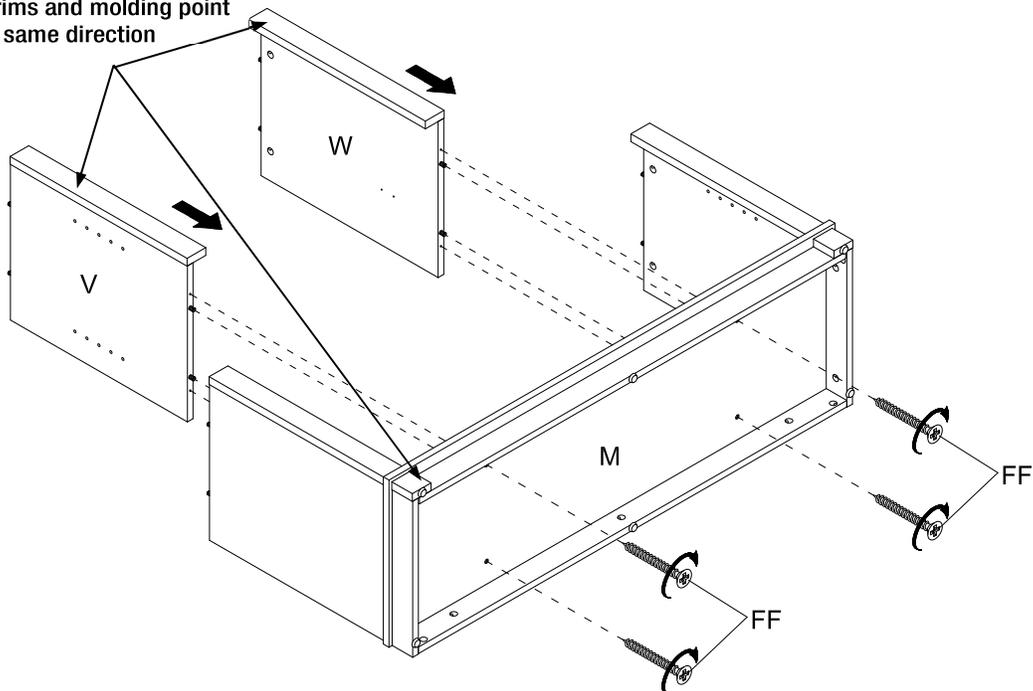


Assembly (continued)

13 Attaching the media shelf


- Place the media shelf (L) onto the inserted wood dowels on the vertical panels properly and fasten it in place by engaging eight cam locks (CC).

The middle crossbar lines up with the trims

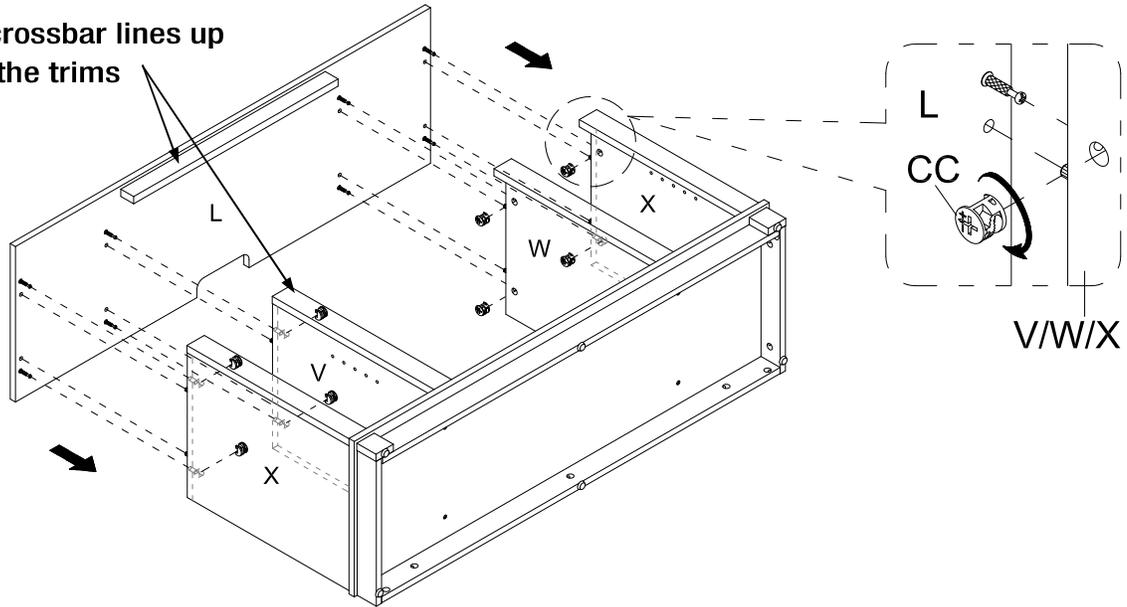

14 Screwing the cam bolts


- Securely screw the cam bolts (DD) into the designated small holes on the media shelf (L) using a Phillips screwdriver.

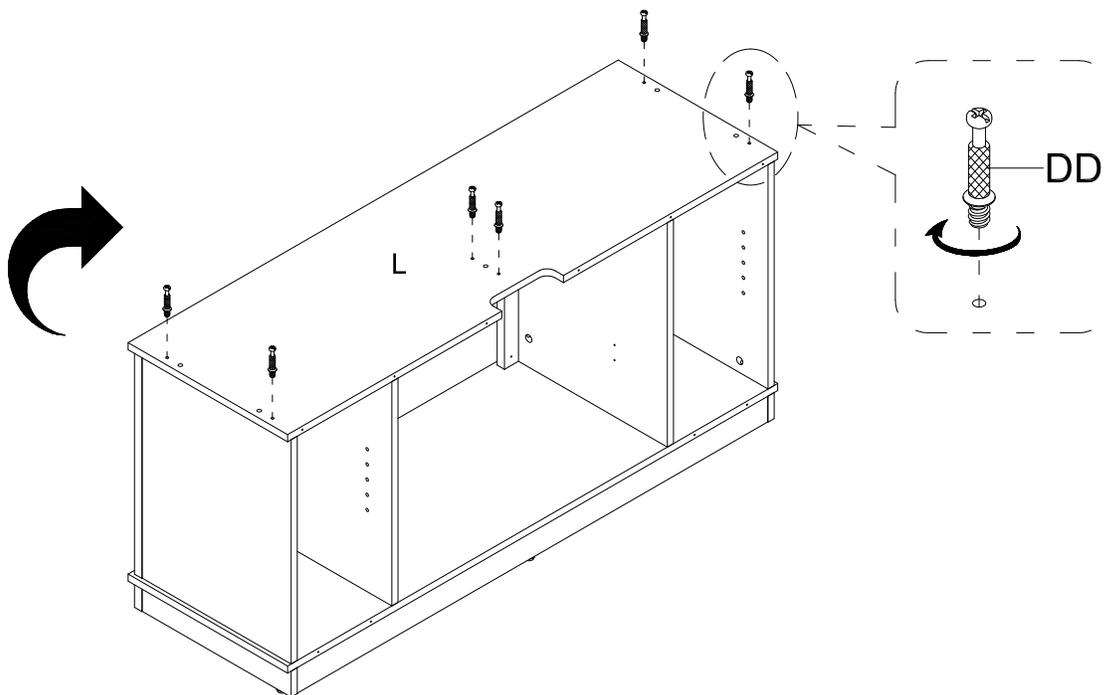

Assembly (continued)


15 Screwing the cam bolts

- Securely screw the cam bolts (DD) into the designated small holes on the top panel (K), upper moldings (R and T) using a Phillips screwdriver.

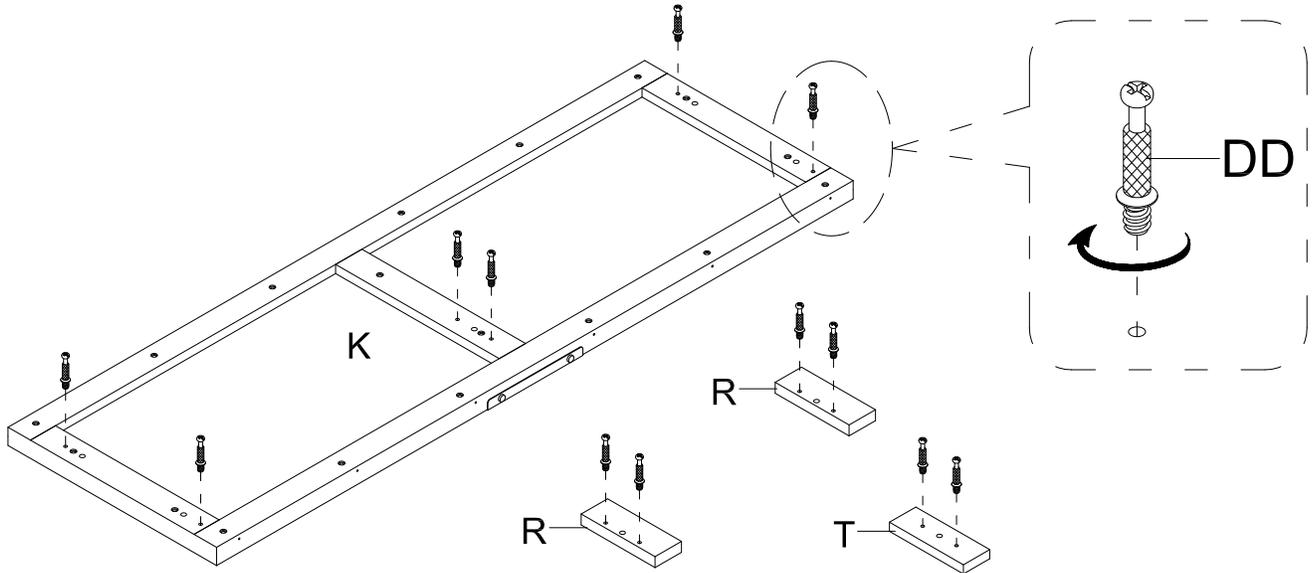

16 Gluing the wood dowels


- Glue the wood dowels (BB) into the inner holes on the upper side panels (S) and upper partition panel (U) as shown.

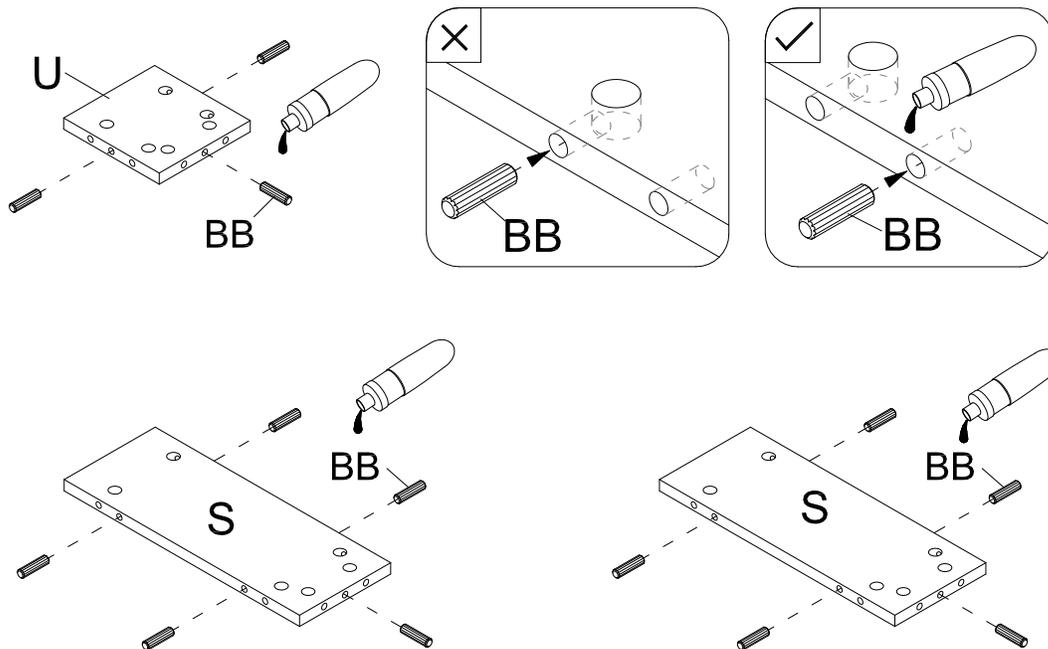

Assembly (continued)


17 Combining the upper side panels and the moldings

- Attach one upper front molding (R) to one upper side panel (S) by engaging two cam locks (CC) as shown.
- Repeat the same procedure to combine the other upper front molding (R) and the remaining upper side panel (S) together.

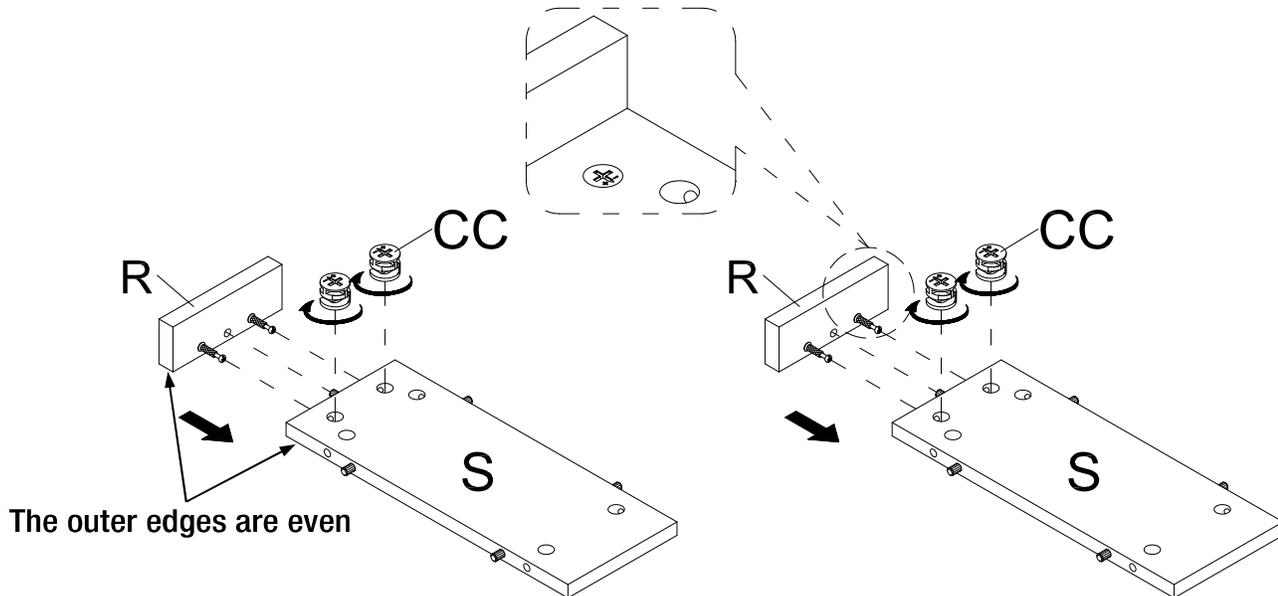

18 Combining the upper partition panel and the molding


- Attach the upper partition molding (T) to the upper partition panel (U) by engaging two cam locks (CC) as shown.

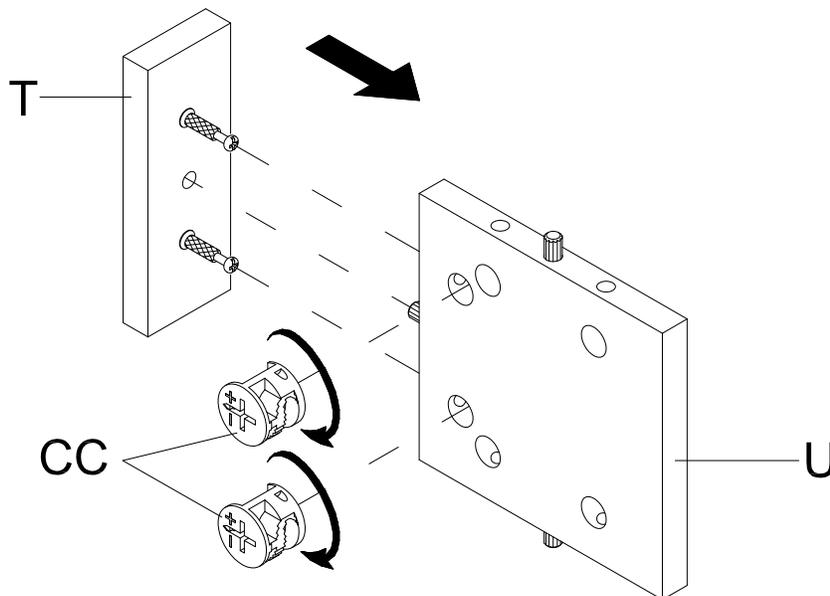

Assembly (continued)


19 Attaching the upper side panels and upper partition

- Stand the assembled unit upright.
- Align and attach the assembled side panels (S) and upper partition (U) to the media shelf (L) by engaging two cam locks (CC) in each.

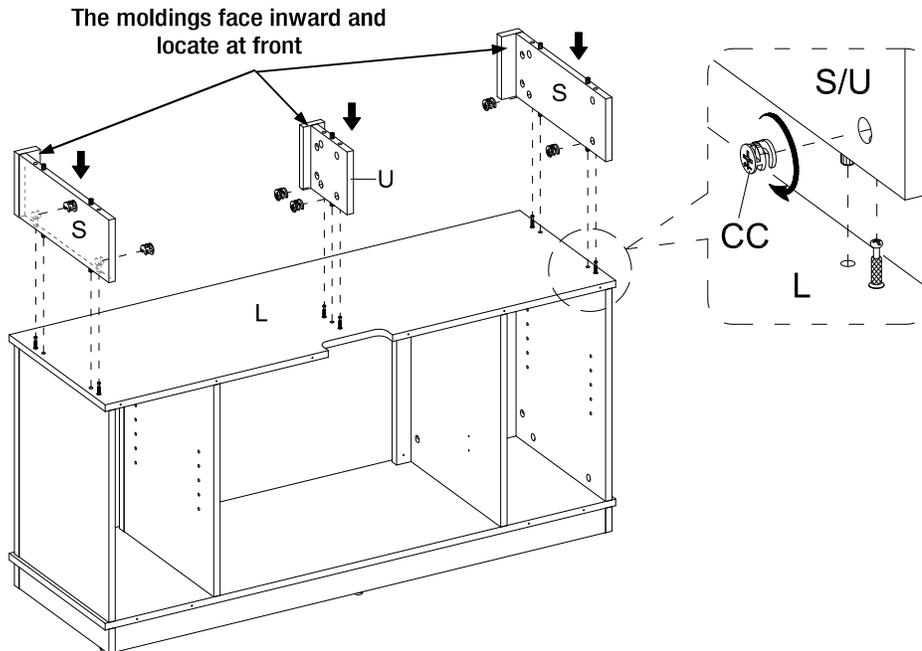

20 Attaching the top panel


- Place the top panel (K) onto the inserted wood dowels on the vertical panels properly and fasten it in place by engaging six cam locks (CC).

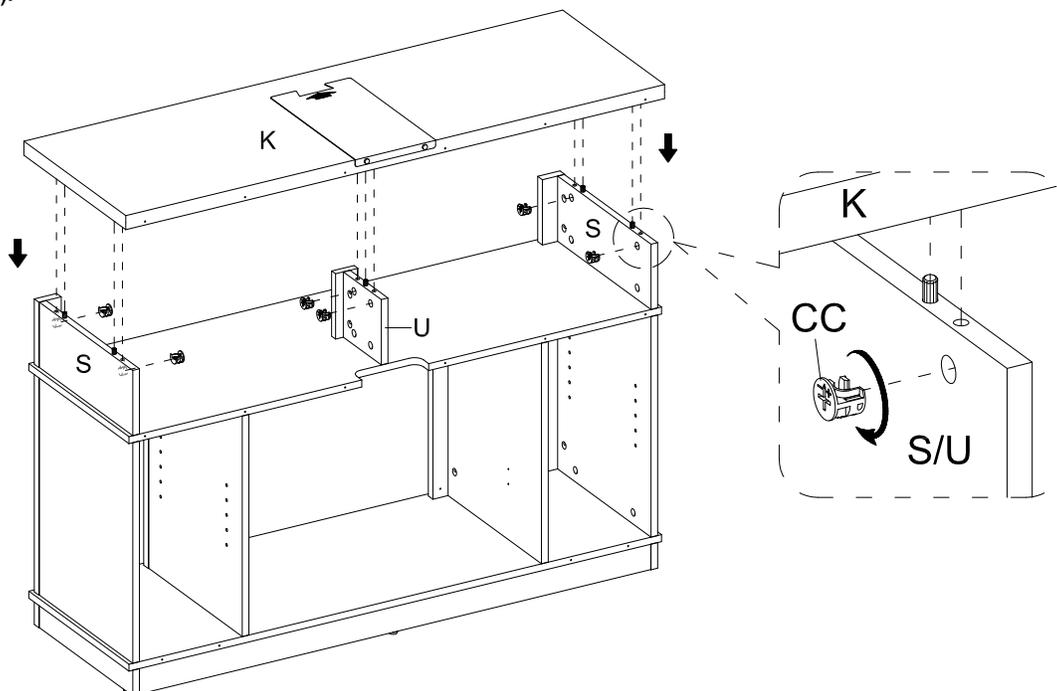

Assembly (continued)

21 Fastening the middle crossbar and middle trims

- Ask for assistance to flip around the previous assembly at its front edges.
- Using the pilot holes as a guide, attach four metal brackets (HH) at the joints where the middle crossbar (B1) meets the middle trims (Z), with two short flat head screws (EE) per plate.
-

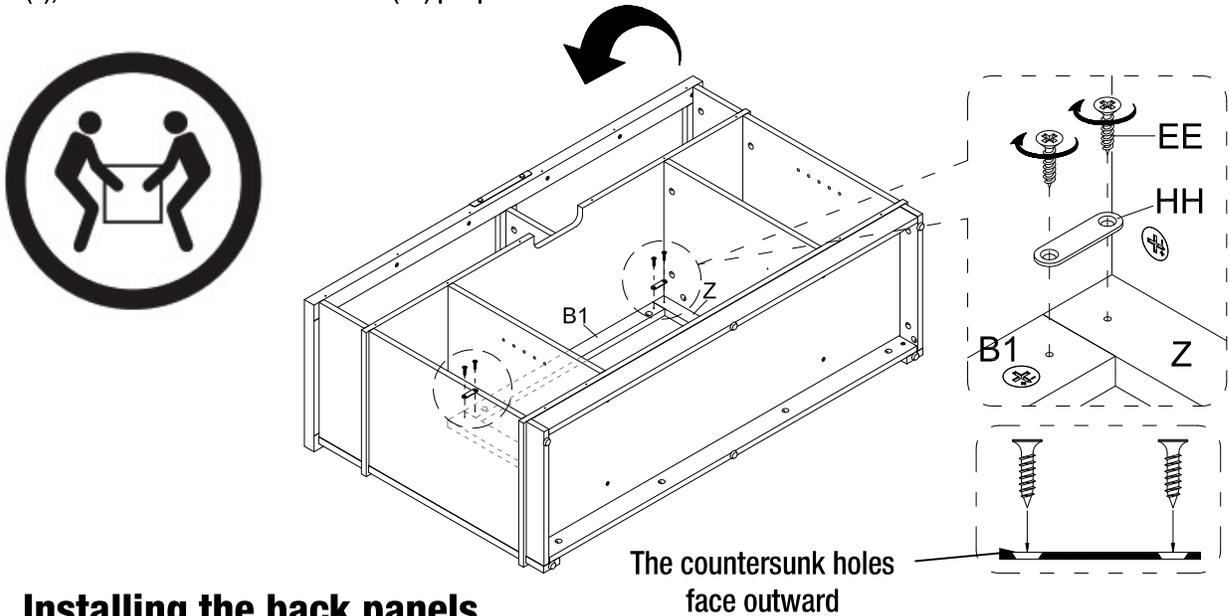


22 Installing the back panels

- Now, go back and securely tighten all the cam locks and screws. Make sure all the parts are tight and there are no gaps between the parts. This will help keep the unit square.
- Ask for assistance to flip around the previous assembly at its front edges.
- Pick up the upper back panel (D1) and align the pre-drilled holes against the upper long edge with the pilot holes on the back of top panel (K). Fasten it in place with the provided washer head screw (GG).
- Using the pilot holes as a guide, align and attach lower back panels (A1) to the mantel frame with the washer head screws (GG).




NOTE: We recommend attaching back panel with the screws at the corners first.

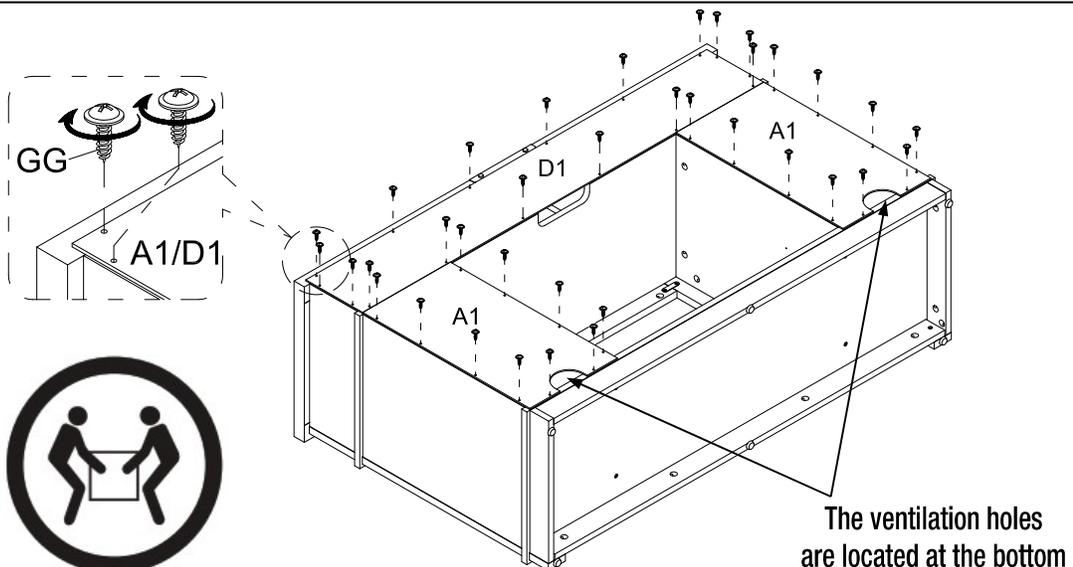

Assembly (continued)


23 Attaching the adjustable shelves

- Insert four shelf supports (II) in the holes at the desired height inside each side compartment. Make sure you place the four shelf supports in the same level so the shelf is not tilted. Tilt and rest the adjustable shelves (E1) onto the shelf supports. Secure the shelf in place with the short flat head screw (EE) for extra support.

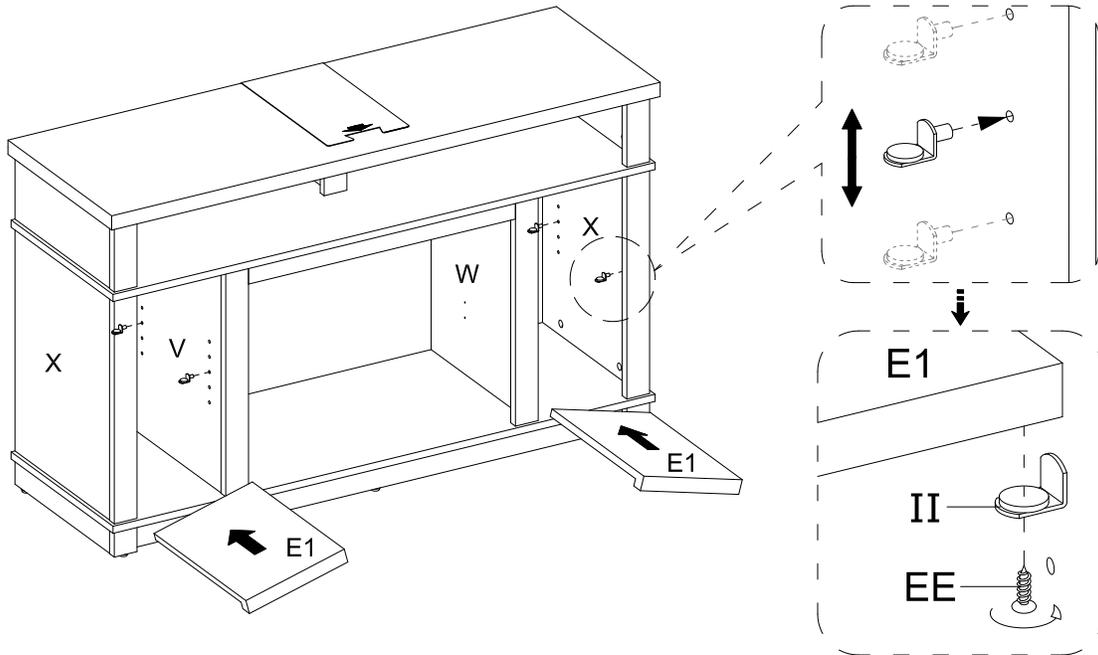

24 Plugging the cam covers

- Plug the cam lock covers (MM) onto the visible cam locks to conceal the cams.

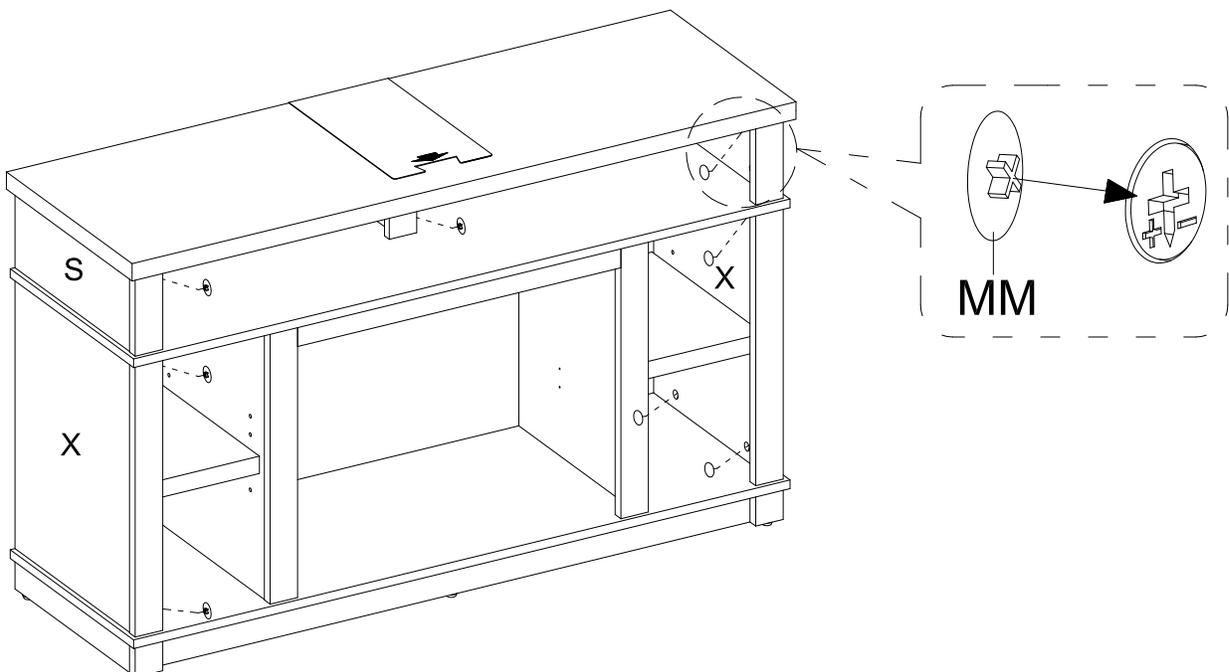

Assembly (continued)

25 Attaching upright arms




IMPORTANT NOTE: Use hand screwdriver, not power driver to assemble fireplace insert. See BILT for video instructions.

- See figure A: Fasten upper 2 screws (AA) through the upright arm (C) into the heater (A) until tight.
- See figure B: Fasten lower 2 screws (AA) into the upright arm (C) until tight.
- Fully tighten all 4 screws (AA) one final time.
- Repeat the same process with upright arm (B).



WARNING: Do not lift or transport the heater by using the upright arms.

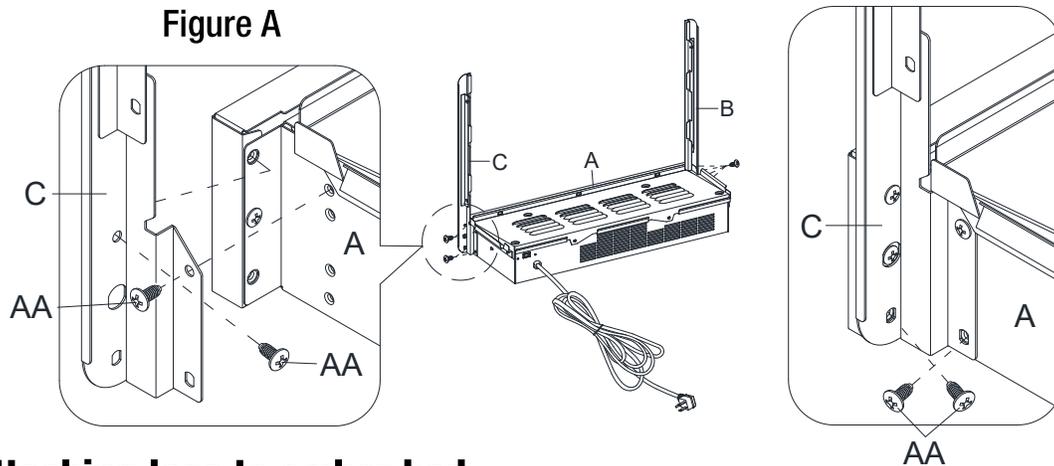


26 Attaching logs to ember bed



IMPORTANT: Carefully follow the 2 steps below for inserting each log.


1. Install left log (F) into left hole of ember bed (E) by inserting front edge of base of the log into front notches of ember bed hole.
 2. Then tilt the log back to insert the rear edge of the log base into rear notches of ember bed hole (press down log firmly to lock into position).
- Repeat the above process for the right log (G).

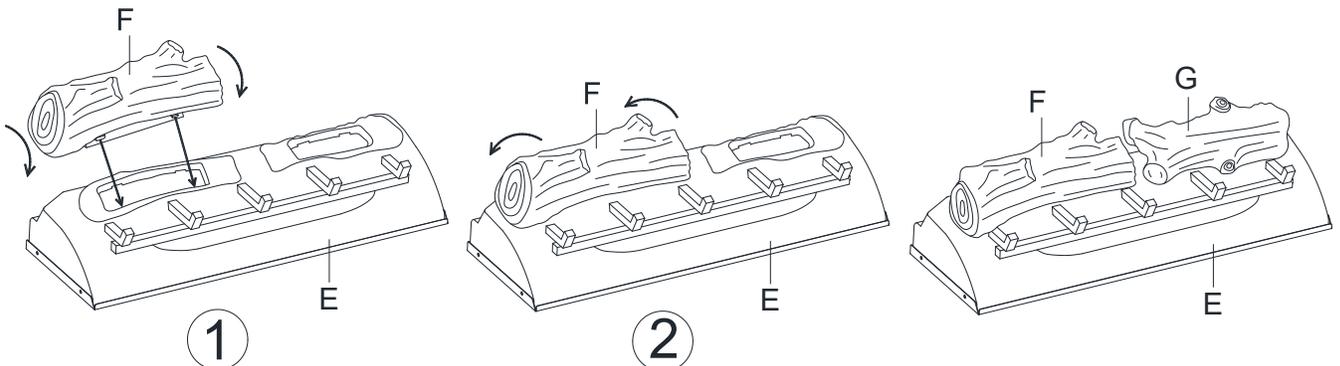

Assembly (continued)


27 Positioning ember bed

- Set the ember bed (E) onto the heater (A) as shown.
- Push ember bed forward against the front flange of heater.
- Position the USB cable as shown below.

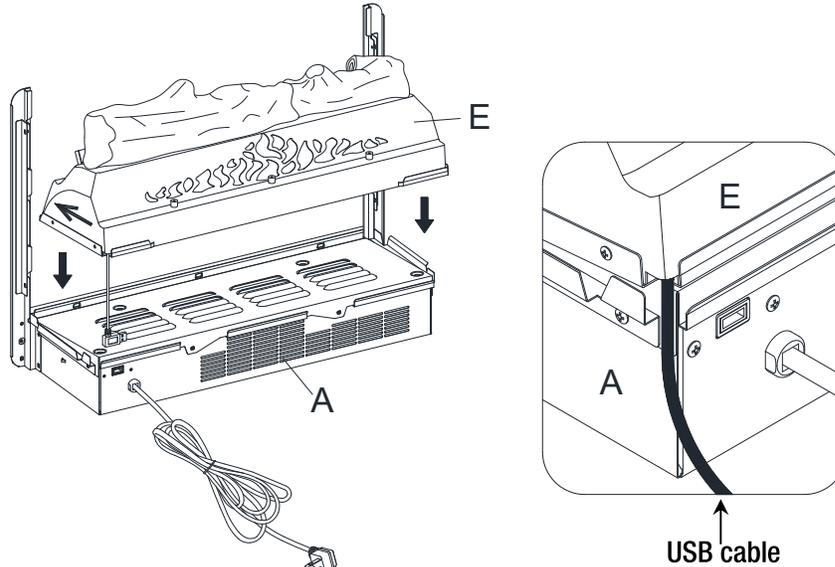

28 Attaching wall panels


- Fold the wall panel (H) as shown. Then position yourself at back side of heater (A).
- Hold wall panel (H) at the angle shown below and insert lower back edge into metal slots on back of heater (A).
- Tilt wall panel (H) forward until bottom corner inserts into lower U-channels on both upright arms (B and C).
- Continue to tilt wall panel (H) forward until the top corner inserts into upper U-channels on both upright arms (B and C).

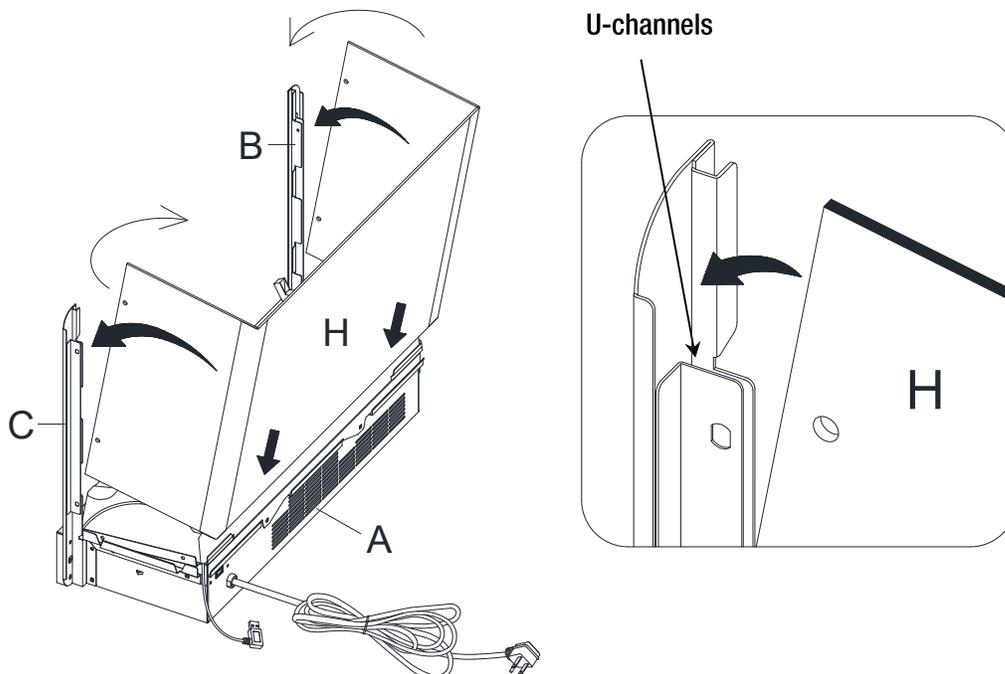

Assembly (continued)


29 Connecting ember bed cable to heater

- Plug the USB connector of the ember bed (E) into the back port of heater (A).

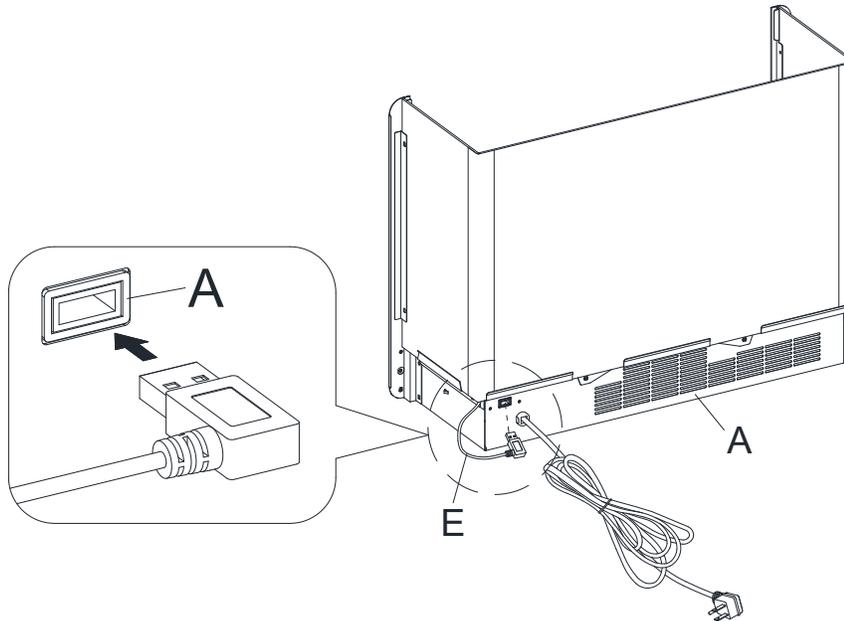


30 Inserting the glass

- Slide the glass (I) into the inner U-channels on both upright arms (B and C) until the glass sits onto the heater (A). If needed, push top of upright arms in or out to accommodate glass. Make sure the top of the glass (I) is flush with the top of both upright arms (B and C).

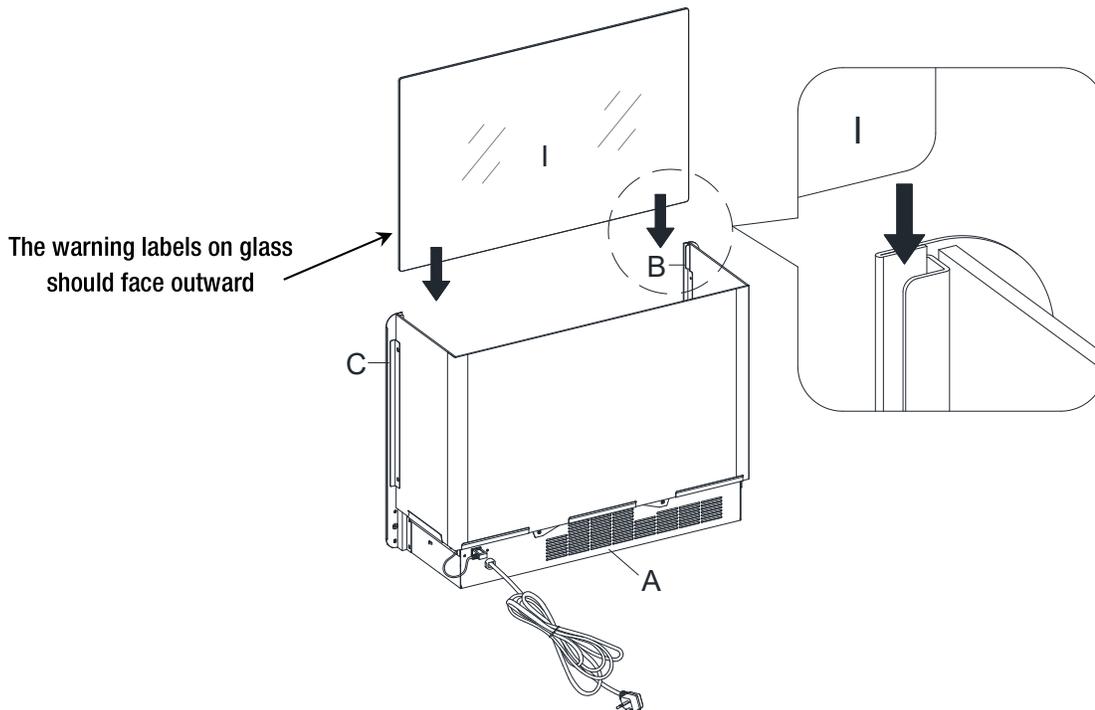


31 Positioning connector strap

- Position top connector strap (D) over the glass (I) and upright arms (B and C). Follow orientation shown below.

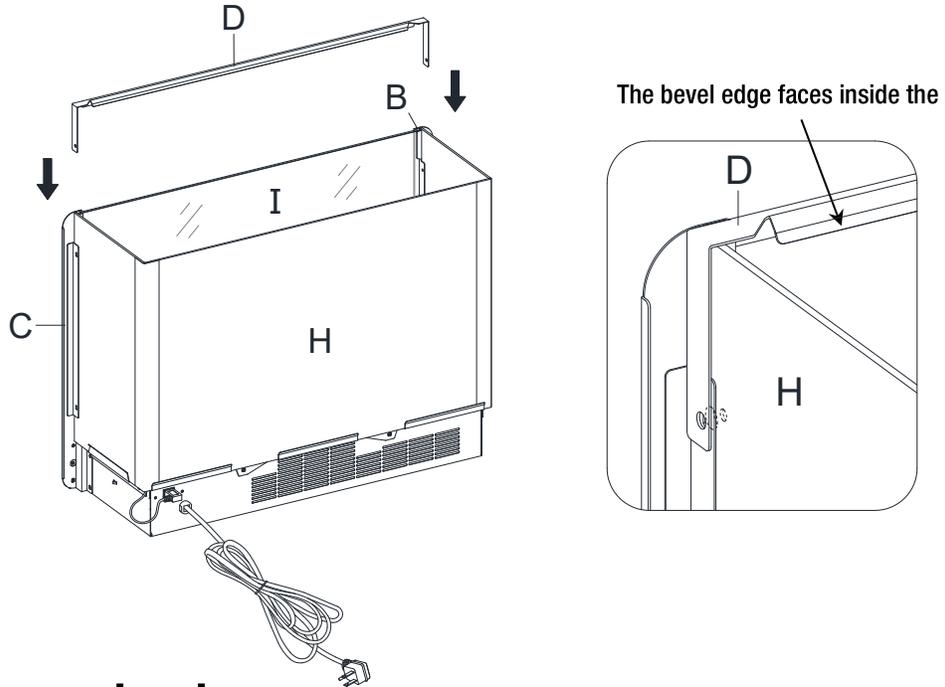

32 Attaching connector strap


- Fasten connector strap (D) to both upright arms (B and C) using two screws (AA) as show below. Holes must be in line for screw to pass through.

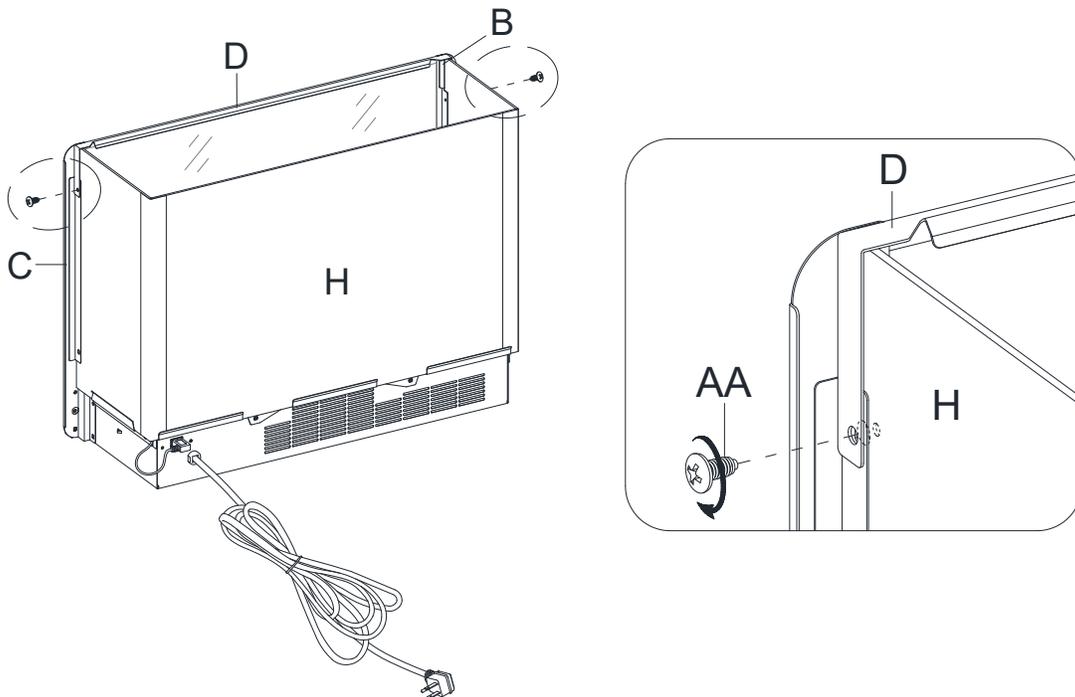

Assembly (continued)


33 Finishing firebox insert assembly

- The firebox is now ready for the next assemble step.

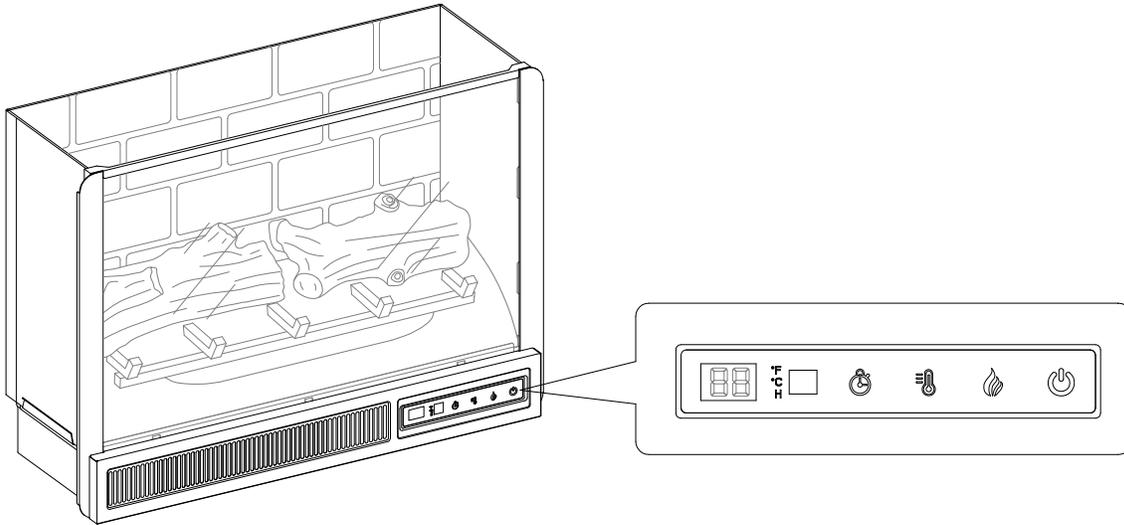

34 Installing the fireplace insert

- Lift the fireplace insert carefully into the back of the assembled mantel and centre it on the bottom panel in the opening.
- Use the pilot holes as a guide, fasten two mending plates (JJ) onto the firebox support (C1) with four pan head screws (KK). Make sure that the right angle is flush with the short edge of firebox support (C1).
- Use the pilot holes as a guide, fasten the firebox support (C1) between the partition panels (V and W) with four pan head screws (KK).

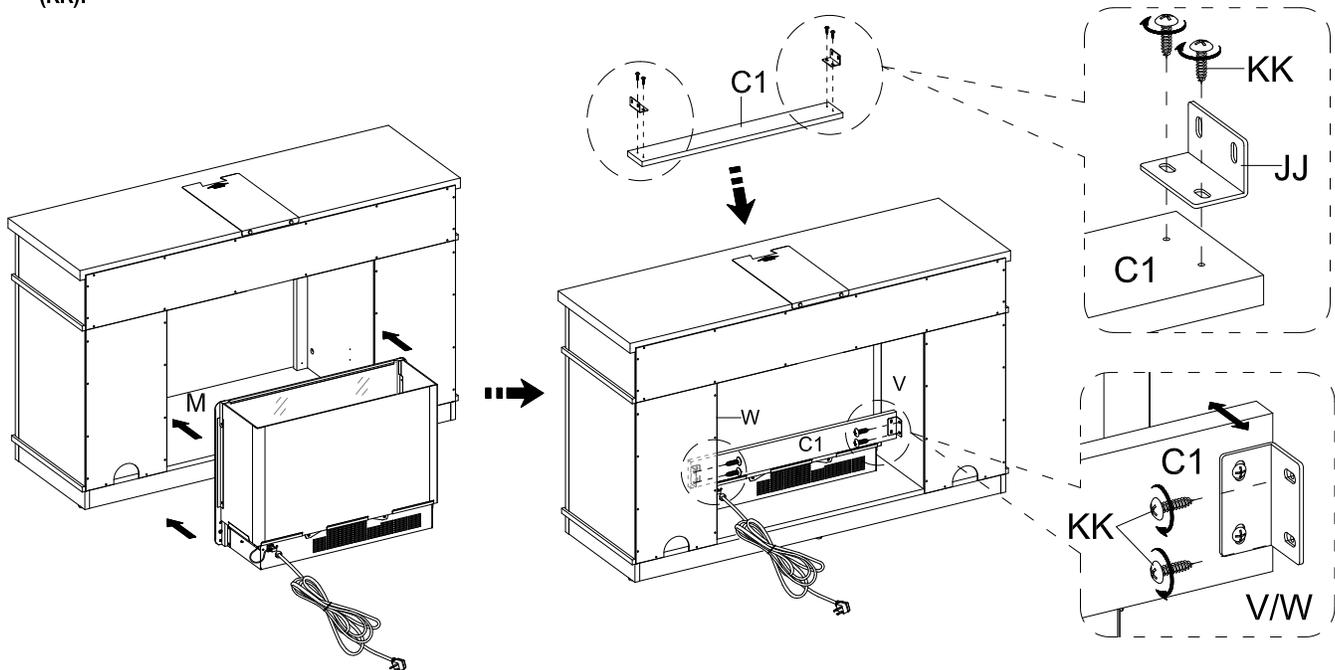

Assembly (continued)


35 Installing the acrylic stopper

- Remove the paper backing of acrylic stopper (LL), then properly align the acrylic stopper into the cutout on the acrylic stopper template on the front of the top panel (K). Press down on the acrylic stopper to help adhesion.



NOTE: To prevent your TV from tipping, you must install the acrylic TV stopper if you place a flat panel television on the top panel. Otherwise, skip to next step.

- At the back of top panel (K), grip the heads of plastic tacks with pliers, with twisting motion pull tacks loose to remove the acrylic stopper template.

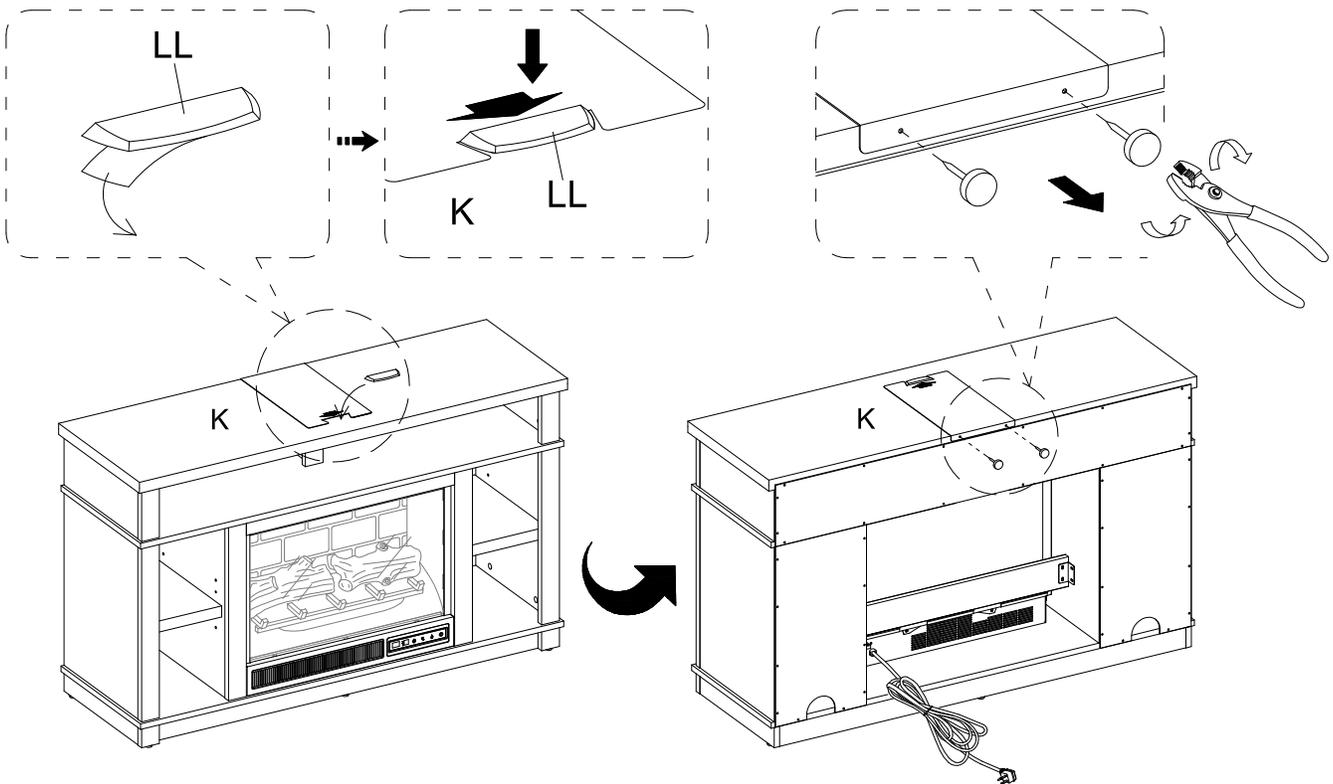


Assembly (continued)

36 Installing the tipping restraint hardware



WARNING: Young children can be seriously injured by tipping furniture. You must install the tipping restraint hardware with the unit to prevent the unit from tipping, causing any accidents or damage. The tipping restraints are intended only as a deterrent, they are not a substitute for proper adult supervision. The tipping restraints are not earthquake restraints. If you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.

- With assistance, position the assembled fireplace at the desired location against a wall. If necessary, adjust the installed floor levelers by hand to correct tilting and level the doors, until the unit is level.
- Follow the instructions printed on the plastic bag containing the tipping restraint hardware to attach the tip-over restraints to the unit and the wall.
- Connect the fireplace to the power transformer. Follow the operating manual for the electric fireplace insert to control your fireplace.

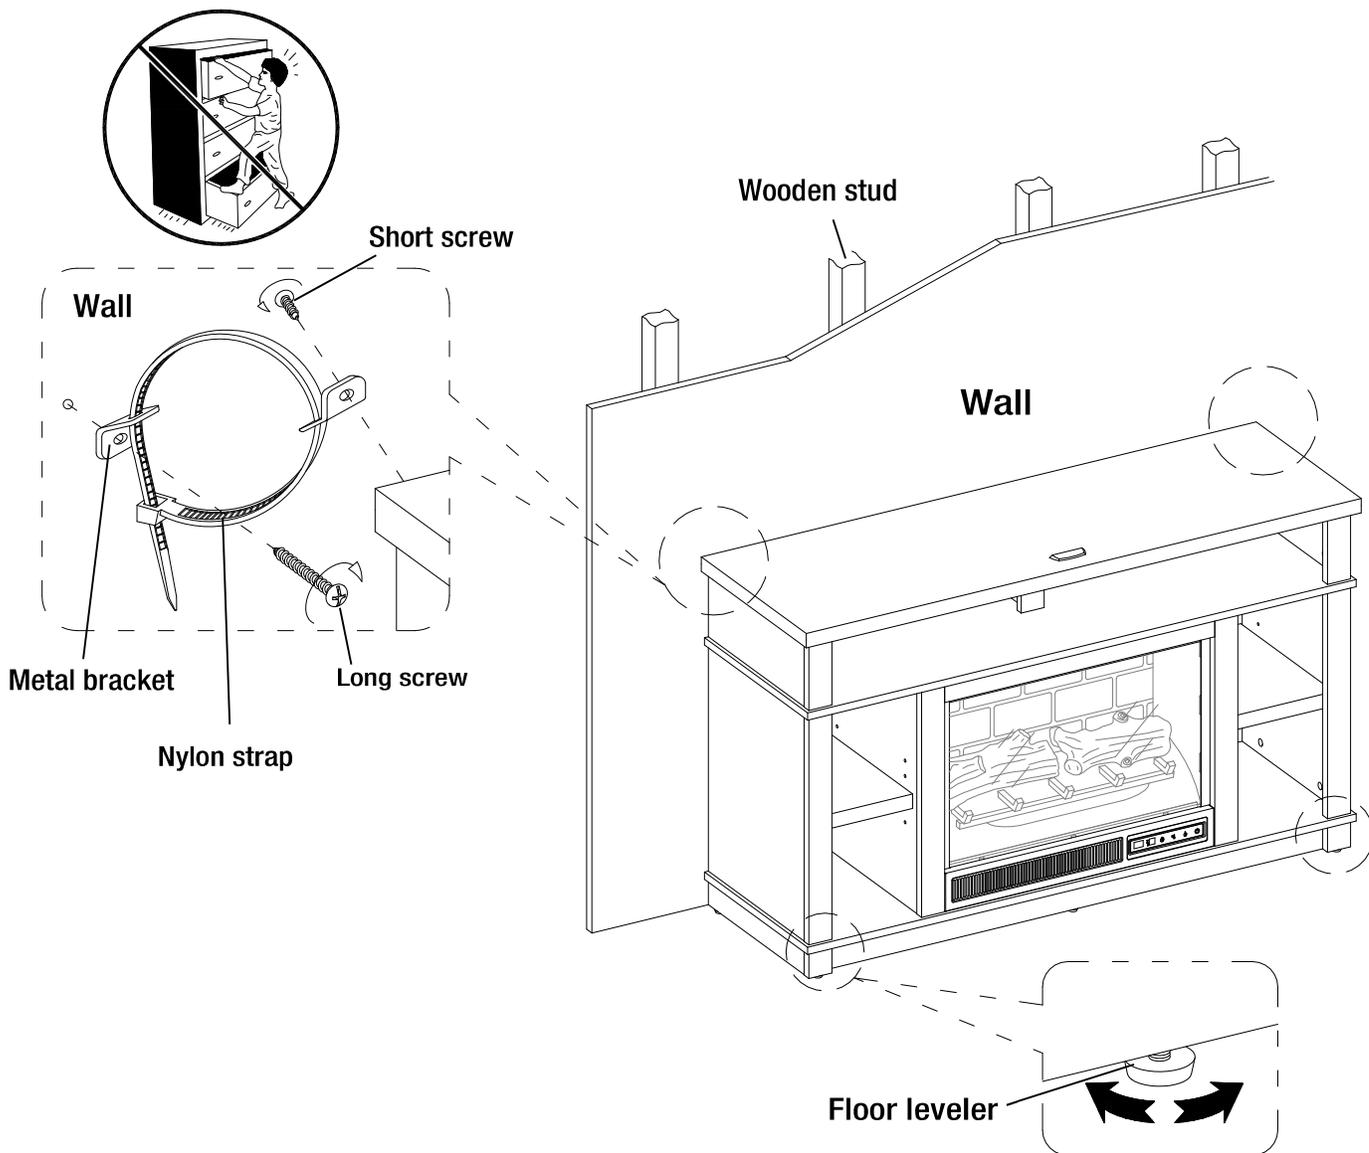

Care and Maintenance

A touch-up pen has been provided to minimize the small nicks or scratches that may occur during assembly or shipping.

To clean and care for your furniture:

- Use a soft, clean cloth that will not scratch the surface when dusting.
- Use of furniture polishes is not necessary. Should you choose to use polishes, test first in an inconspicuous area.
- Using solvents of any kind on your furniture may damage the finish.
- Never use water to clean your furniture as it may cause damage to the finish.
- Always use coasters under beverage glasses and flowerpots.
- Liquid spills should be removed immediately. Using a soft clean cloth, blot the spill gently. Avoid rubbing.
- Always use protective pads under hot dishes and plates. Heat can cause chemical changes that may create spotting within the furniture finish.
- In the event that your furniture is stained or otherwise damaged during use, we recommend that you call a professional to repair your furniture.
- Check bolts/screws periodically and tighten them if necessary.

CARING FOR WOOD FURNITURE

It is best to keep your furniture in a climate-controlled environment. Extreme temperature and humidity changes can cause fading, warping, shrinking and splitting of wood. It is advised to keep furniture away from direct sunlight as sun may damage the finish.

Proper care and cleaning at home will extend the life of your purchase. Following these important and helpful tips will enhance your furniture as it ages.

CLEANING THE FIREPLACE TRIM

Clean the metal trim using a soft cloth, slightly dampened with citrus oil based product and buff with a clean soft cloth. DO NOT use brass polish or household cleaners as these products will damage the metal trim. Citrus oil based products can be obtained at supermarkets or hardware stores.



WARNING

- Unit must be placed on a level surface or leveled with included hardware (when applicable).
- Do not sit or stand on or allow children to climb, sit or stand on the assembled product.
- For safety reasons, it is imperative that this unit be mounted to the wall or floor.
- Unit can tip over causing severe injury or death.
- Never open more than one drawer at a time.
- Do not exceed the recommended weight limits.
- Before cutting, drilling or hammering into any wall or floor surface, verify the location of electrical, plumbing and gas lines. Cutting may cause serious injury.

StyleWell™

Questions, problems, missing parts? Before returning to the store,
call StyleWell Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-877-527-0313

HOMEDEPOT.COM

Retain this manual for future use.